


FAST DRY

NEW METAL

HK-JA(SR)

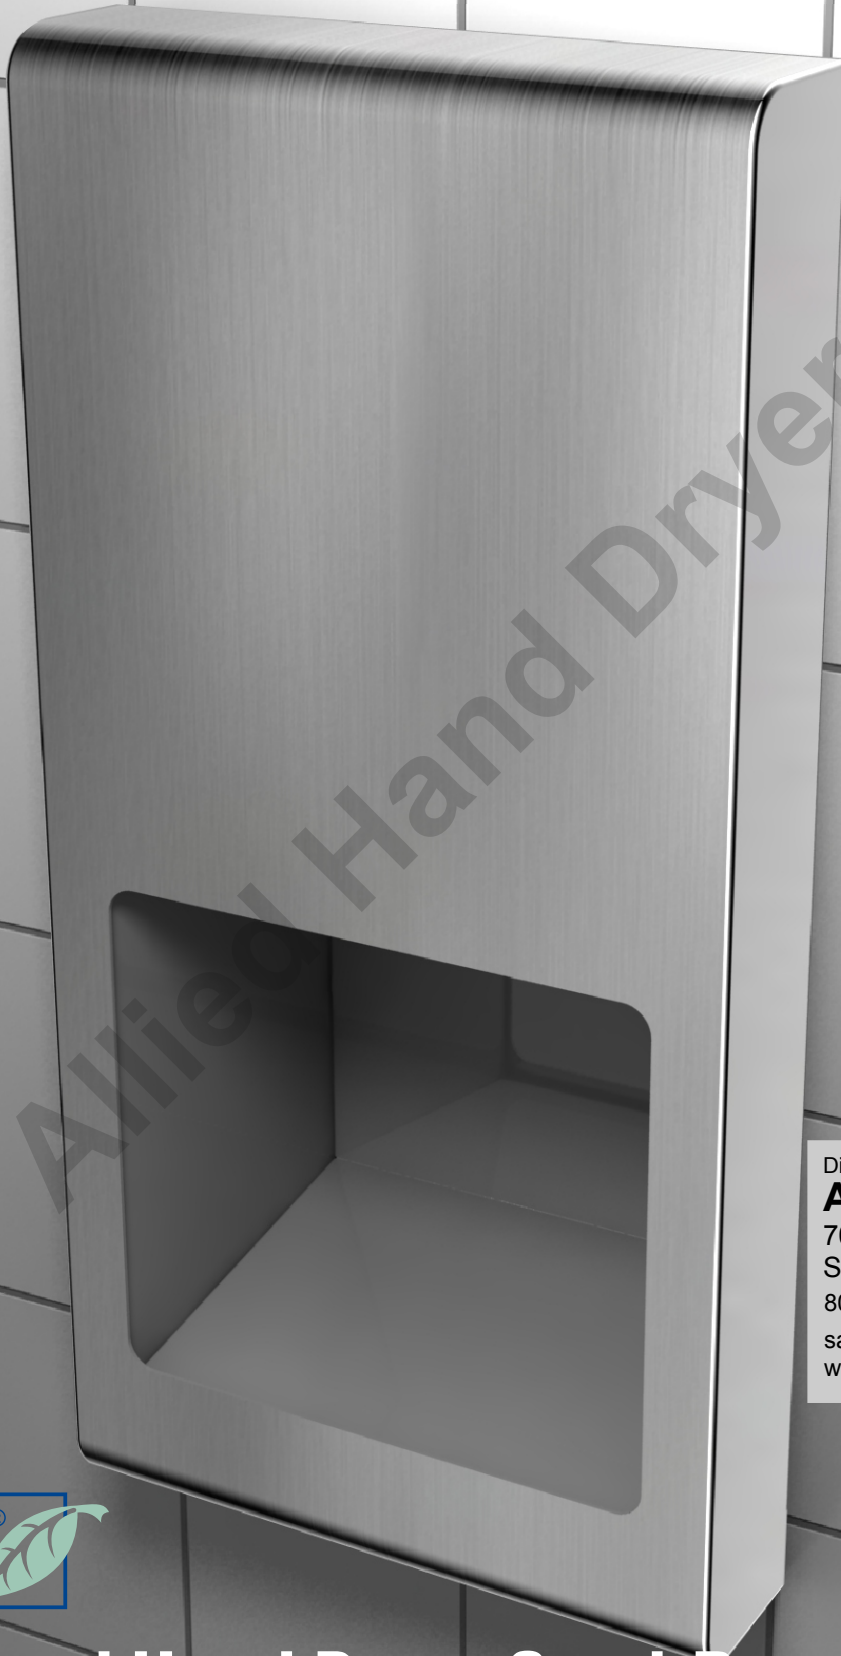

Distributed by:
Allied Hand Dryer, Ltd.
706 W Summit Ave
San Antonio TX 78212
800.535.4393 • 210.733-5918
sales@handdryer.com
www.handddryer.com



High Speed Hand Dryer Semi-Recessed Type

Certificates:          **RoHS WEEE** 

HK-JA(SR)

High Speed, Recessed Hand Dryer

Save Power,
Save the Environment,
and Save Money

TECHNICAL SPECIFICATIONS

ITEM CATEGORY

Operating Voltage

Warm Air Speed Output

Motor Type

Motor Thermal Protection

Heater Element

Heater Thermal Protection

Drying Time

Circuit Operation

Sensor Range

Timing Protection

Drip Proof

Sound Level

Isolation

Net Weight

Shipping Weight

Unit Size

Rough Wall Opening

PERFORMANCE DATA

110-120 Vac, 50/60 Hz, 1.3-1.6 KW

220-240 Vac, 50/60 Hz, 1.3-1.6 KW

75-100 m/s (169-225 mi/hr), adjustable

350-700W, 12000-18000 R.P.M, adjustable;

Brush Type, Dual Ball Bearings

Auto Resetting Thermostat turns unit off at 105°C {221°F}

450-900W, adjustable

Auto Resetting Thermostat turns unit off at 85°C {185°F};

Thermal fuse cut unit off at 142°C {288°F}

Less than 10-15 seconds

Infrared Automatic, self adjusting

51 mm to 330 mm [2" to 13"], adjustable;

standard 180 mm±20 mm [7"]

60 seconds auto shut off

IPX1 ◆

78±1 dB at 1 m

CLASS 1

11.6 kg [25.6 lbs]

13.2 kg [29.2 lbs]

250 mm W x 513 mm H x 179 mm D

[9-27/32" x 20-13/64" x 7-3/64"]

235 mm W x 495 mm H x 123 mm D

[9-1/4" x 19-31/64" x 4-27/32"]

Distributed By: Allied Hand Dryer 706 W. Summit Ave
San Antonio, TX 78212 1-800-535-4393 www.handdryer.com

Casing:

HK-JA(SR) 01 - Stainless steel; Satin finished. (t:1.5 mm)

Patent: USA EUROPE CHINA TAIWAN